


最高使用回転数  
allowable speed  
最高使用转速

軸径  
Shank dia  
柄直径

ケース入数  
pcs / pac  
1盒数

粒度  
grain size  
粒度

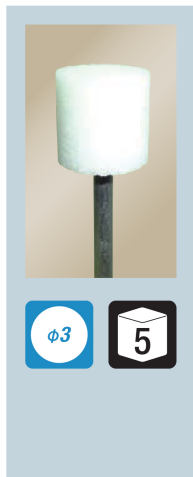


φ3 5

砥粒の材質 結合剤 結合度  
WA 白 V P


#60

45,600 min<sup>-1</sup>



G3216


36,000 min<sup>-1</sup>



G3217


#80

105,000 min<sup>-1</sup>

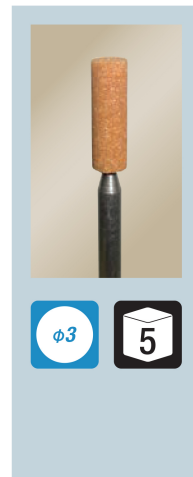

φ3 5

砥粒の材質 結合剤 結合度  
WA 赤 V P




G3221

G 砥石

合金鋼、炭素鋼、工具鋼、ステンレス鋼、一般鋼材（一般ハンドグラインダー用）

#80


95,000 min<sup>-1</sup>



G3222


#60

88,000 min<sup>-1</sup>




G3223

72,000 min<sup>-1</sup>




G3224

62,400 min<sup>-1</sup>




G3225

45,600 min<sup>-1</sup>




G3226

36,000 min<sup>-1</sup>



G3227

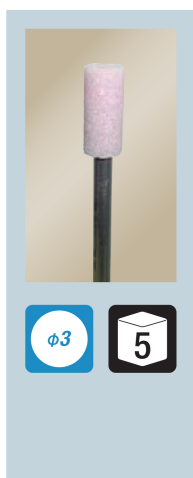


φ3 5

砥粒の材質 結合剤 結合度  
PA ピンク V N


#80

105,000 min<sup>-1</sup>



G3231


95,000 min<sup>-1</sup>



G3232


#60

88,000 min<sup>-1</sup>




G3233

72,000 min<sup>-1</sup>



G3234

62,400 min<sup>-1</sup>



G3235

合金鋼、炭素鋼、工具鋼、ステンレス鋼、一般鋼材（一般ハンドグラインダー用）