


φ6

2

スリットサンダー

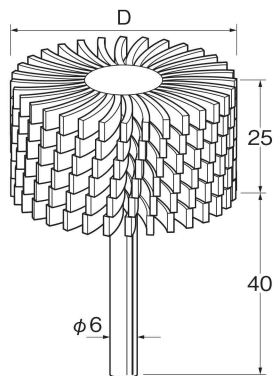


1

D	φ50	φ80	φ100
# 60	S1961	S1965	S1901
# 80	S1962	S1966	S1902
#100	S1963	S1967	S1903
#120	S1964	S1968	S1904
最高使用回転数	10,000min ⁻¹	6,000min ⁻¹	5,000min ⁻¹

砥粒の材質

A


ダイヤモンドフラップサンダー セラミック、ガラス、石材、金属など難削材の研磨に最適です。

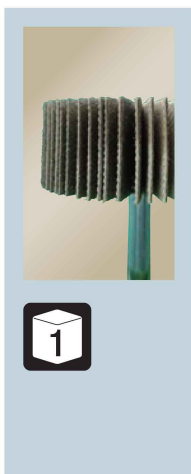

15,000
min⁻¹

φ3


1



#100	S1971	S1976
#180	S1972	S1977
#240	S1973	S1978
#400	S1974	S1979

10,000
min⁻¹

φ6

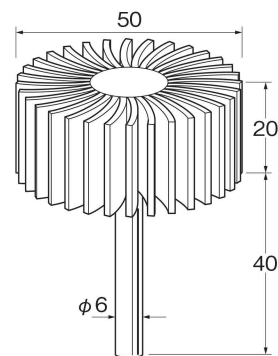

#100	S1981
#180	S1982
#240	S1983
#400	S1984

砥粒の材質

D